

Product Specifications

CTBAW383

38 Nm RIGHT ANGLE

10 - 38 Nm (7.4 - 28.0 ft·lbs)

Designed to enable the Smart Factory of Tomorrow, Cleco introduces the most advanced cordless nutrunner - CellTek.™

FEATURES

- On-Tool Storage Back-up on-tool data collection in the event of disrupted connection
- Cost Savings Connect up to 16 tools to 1 controller
- Flexible Easily connects over Wifi (2.4 & 5.0 GHz) or Bluetooth 4.0
- Multi-Color LED Work light for secondary "ok/not ok" operator feedback while also illuminating your workpiece
- Compatibility Forward and backward compatibility with Cleco's entire Global cordless Controller platforms
- Stay Alive Function Prevents reboot during battery change, gaining time and efficiency
- Enhanced WiFi Range Up to 300 feet for a broad connection within your production facility
- Decreased Takt Times Patented motor technology allows increased speeds over other battery platforms

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 10 - 38

TORQUE RANGE (ft-lb)

Min / Max: 7.4 - 28.0

SPEED


r/min: 395

WEIGHT & DIMENSIONS

Weight w/o Battery
Length
Length
Height
Side to Center
Output
Country of Origin:

1.55 kg / 3.4 lb
525 mm / 20.60 in
44.5 mm / 1.75 in
16.5 mm / 0.65 in
3/8" Square Drive

 ϵ

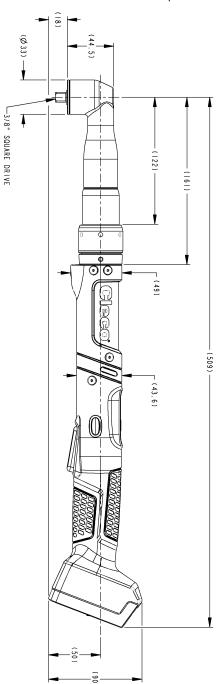



Apex Tool Group, LLC

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de