

The NeoTek[™] fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

FEATURES

- 1 million cycles maintenance-free*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts
- Compatible with:
 - o mPro400GCD-P Controller
 - o 961560-xxx Tool Cable
 - 961561-xxx Tool Extension Cable

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 4.4 / 21

TORQUE RANGE (ft-lb)

Min / Max: 3.2 / 15.4

SPEED

r/min: 835

WEIGHT & DIMENSIONS

Weight 1.32 kg / 2.91 lb

Length 408 mm / 16.06 in

Side to Center 16.4 mm / 0.65 in

Height 40.3 mm / 1.58 in

Output Drive 3/8" Sq. Drive


Country of Origin: Assembled in USA

 ϵ

Product Specifications 30EAN21FA3

RIGHT ANGLE CORDED NUTRUNNER 4.4 - 21 Nm (3.2 – 15.4 ft·lbs)

RIGHT ANGLE - 30 SERIES

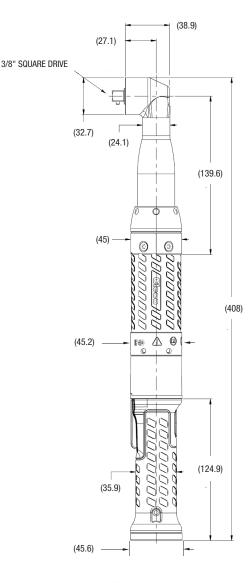

(Units are in metric)

Apex Tool Group, LLC

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0

www.ClecoTools.com / www.ClecoTools.de

