

The NeoTek<sup>™</sup> fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

## **FEATURES**

- 1 million cycles maintenance-free\*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts
- Compatible with:
  - o mPro400GCD-P Controller
  - o 961560-xxx Tool Cable
  - 961561-xxx Tool Extension Cable

# **SPECIFICATIONS**

### **TORQUE RANGE (Nm)**

Min / Max: 6 / 30

### **TORQUE RANGE (ft-lb)**

Min / Max: 4.4 / 22.1

**SPEED** 

r/min: 1,765

### **WEIGHT & DIMENSIONS**

 Weight
 1.60 kg / 3.53 lb

 Length
 449 mm / 17.68 in

 Side to Center
 16.4 mm / 0.65 in

 Height
 40.3 mm / 1.58 in

 Output Drive
 3/8" Sq. Drive


Country of Origin: Assembled in USA



# Product Specifications 50EAN30FA3

RIGHT ANGLE CORDED NUTRUNNER 6 - 30 Nm (4.4 – 22.1 ft·lbs)

**RIGHT ANGLE - 50 SERIES** 

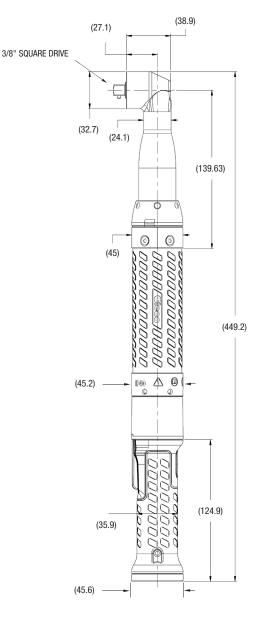

(Units are in metric)

**Apex Tool Group, LLC** 

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0

www.ClecoTools.com / www.ClecoTools.de

