

The NeoTek[™] fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

FEATURES

- 1 million cycles maintenance-free*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts
- Compatible with:
 - mPro400GCD-P Controller
 - 961560-xxx Tool Cable
 - o 961561-xxx Tool Extension Cable

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 16 / 80

TORQUE RANGE (ft-lb)

Min / Max: 11.8 / 59.0

SPEED

r/min: 670

WEIGHT & DIMENSIONS

Weight 2.17 kg / 4.78 lb

Length 473 mm / 18.62 in

Side to Center 22.8 mm / 0.90 in

Height 48.5 mm / 1.91 in Output Drive 1/2" Sq. Drive


Country of Origin: Assembled in USA

((

Product Specifications 50EAN80JA4

RIGHT ANGLE CORDED NUTRUNNER 16 - 80 Nm (11.8 – 59.0 ft·lbs)

RIGHT ANGLE - 50 SERIES

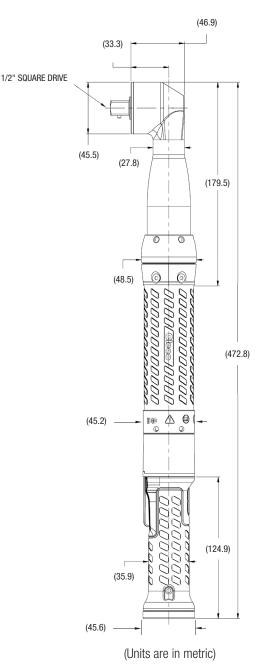

Apex Tool Group, LLC

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de

