

The NeoTek[™] fastening system is the next

generation of smart tool solutions. The lightweight,


ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts,

and handle vibration all create a better user experience that leads to decreased operator fatigue and increased

Product Specifications 30ESN05BDQ

INLINE CORDED NUTRUNNER 0.9 - 4.7 Nm (0.6 – 3.4 ft·lbs)

INLINE - 30 SERIES

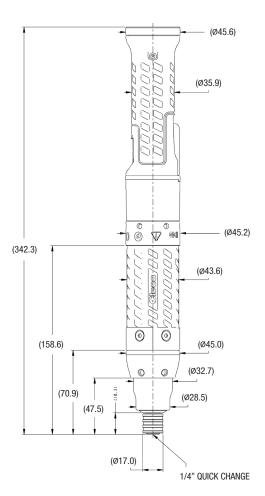

FEATURES

productivity.

- 1 million cycles maintenance-free*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

SPECIFICATIONS

TORQUE RANGE (Nm)	
Min / Max:	0.9 / 4.7

TORQUE RANGE ((ft·lb)
-----------------------	---------

Min / Max: 0.6 / 3.4

SPEED

r/min:

4,275

WEIGHT & DIMENSIONS

Weight	0.96 kg / 2.12 lb
Length	342 mm / 13.46 in
Side to Center	16.3 mm / 0.64 in
Output Drive	1/4" QC Drive

Country of Origin: Assembled in USA



Apex Tool Group, LLC Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de

*based on recommended tool model torque range and clockwise rotation

