

The NeoTek<sup>™</sup> fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

## **FEATURES**

- 1 million cycles maintenance-free\*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

## **SPECIFICATIONS**

**TORQUE RANGE (Nm)** 

Min / Max: 3.9 / 11.6

**TORQUE RANGE (ft-lb)** 

Min / Max: 2.8 / 8.5

**SPEED** 

r/min: 1,650

## **WEIGHT & DIMENSIONS**

Weight 1.06 kg / 2.34 lb

Length 361 mm / 14.21 in

Side to Center 16.3 mm / 0.64 in

Output Drive 1/4" QC Drive


Country of Origin: Assembled in USA

 $\epsilon$ 

## Product Specifications 30ESN12EAQ

INLINE CORDED NUTRUNNER 3.9 - 11.6 Nm (2.8 - 8.5 ft·lbs)

**INLINE - 30 SERIES** 

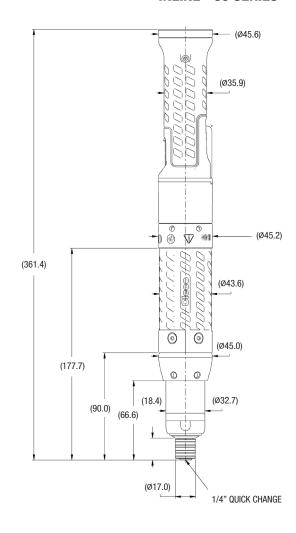

Apex Tool Group, LLC

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0

www.ClecoTools.com / www.ClecoTools.de

Cleco