

The NeoTek[™] fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

FEATURES

- 1 million cycles maintenance-free*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

SPECIFICATIONS

TORQUE RANGE (Nm)

Min / Max: 3.9 / 11.6

TORQUE RANGE (ft-lb)

Min / Max: 2.8 / 8.5

SPEED

r/min: 1,650

WEIGHT & DIMENSIONS

Weight 1.06 kg / 2.34 lb

Length 357 mm / 14.05 in

Side to Center 16.3 mm / 0.64 in

Output Drive 3/8" Sq. Drive


Country of Origin: Assembled in USA

(E

Product Specifications 30ESN12FA3

INLINE CORDED NUTRUNNER 3.9 - 11.6 Nm (2.8 - 8.5 ft·lbs)

INLINE - 30 SERIES

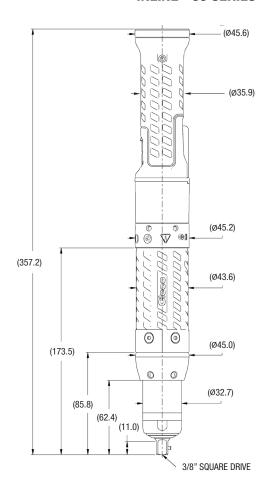



Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0

www.ClecoTools.com / www.ClecoTools.de



