

Conventional Spindle Cables - Type A2

- Alternative to 960430-xxx for robot applications
- Extra-flexible connection between nutsetter and intermediate connection point in SuperHighFlex quality




MODEL	LENGTH	
	FT	M
960433-020	6.6	2
960433-040	13.1	4
960433-060	19.7	6
960433-100	32.8	10
960433-200	65.6	20
960433-300	98.4	30
960433-400	131.2	40
960433-500	164.1	50

PE cable for fastener plate 960408-xxx. Available in any length, preferred in 2 m grid.
The order number extension indicates the length of the cable in decimetres.
1960960-XXX must be used parallel to cable type B and C. 2960961-XXX must be used parallel to cable type A1 and A2


Intelligent Spindle System Cable - Highflex Field Cable - Straight Connectors

- For fixed or flexible routing with heavy-duty requirements in applications with cable drag chain or standard robot applications.

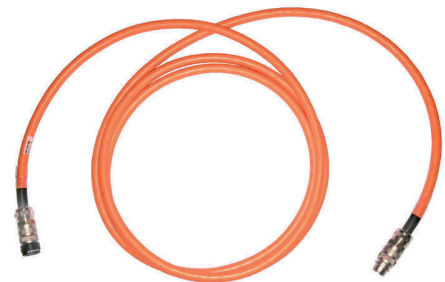


MODEL	LENGTH	
	FT	M
961104-030	9.8	3
961104-040	13.1	4
961104-050	16.4	5
961104-060	19.7	6
961104-070	23.0	7
961104-080	26.2	8
961104-090	29.5	9
961104-100	32.8	10
961104-150	49.2	15
961104-200	65.6	20
961104-300	98.4	30
961104-400	131.2	40
961104-500	164.1	50

Intelligent Spindle System Cable - Highflex UL CAS Field Cable - Straight Connectors

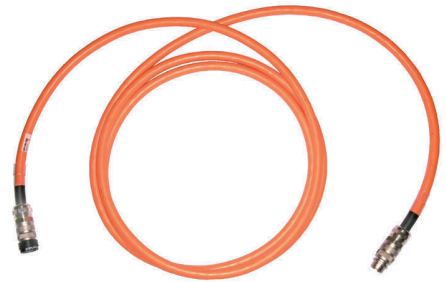

MODEL	LENGTH	
	FT	M
961204-005	1.6	0.5
961204-010	32.8	10
961204-020	65.6	20
961204-100	328.1	100
961204-120	393.7	120
961204-150	492.2	150
961204-200	656.2	200
961204-300	984.3	300


Intelligent Spindle System Cable - Highflex UL CAS Field Cable - Angle to Straight Connectors

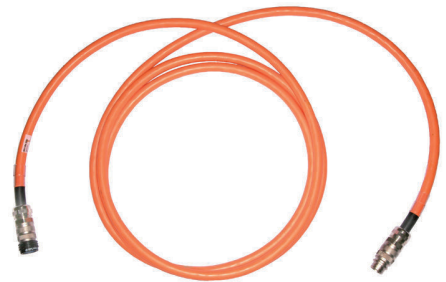

MODEL	LENGTH	
	FT	M
96169-150	492.2	150

Highflex Jumper Cable with Straight Connectors

- Highflex Type D straight connector on both sides
- Moulded connector housing

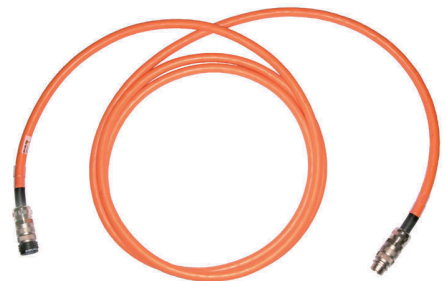


MODEL	LENGTH	
	FT	M
961104-005	1.6	0.5
961104-010	3.3	1
961104-020	6.6	2

DGD Floating Adaptor



MODEL	MOTOR SIZE	TORQUE RANGE MAX		X DIMENSION IN MM	OUTPUT DRIVE IN
		FT LB	NM		
910609	2	118	160	7.08 180	1/2 IN
910613	3	384	520	7.28 185	3/4 IN
912106	4	384	520	7.48 190	3/4 IN
912147	4	554	750	7.32 186	1 IN
916642	4	465	630	7.28 185	1 IN
916643	4	384	520	7.48 190	3/4 IN
922325PT	1	44.3	60	7.08 180	3/8 IN
935552	2	148	200	7.08 180	3/4 IN
S308441	4	1181	1600	5.31 140	1-1/2 IN
S976956	4	554	750	5.31 140	1 IN


DGD Floating Adaptor Including Flange Housing

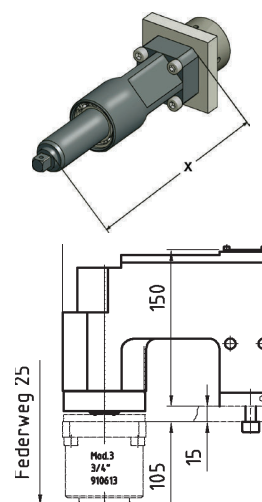

MODEL	MOTOR SIZE	TORQUE RANGE MAX		X DIMENSION IN MM	OUTPUT DRIVE IN
		FT LB	NM		
S308434	1	44.3	60	6.61 168	3/8 IN
S308435	2	118	160	6.77 172	1/2 IN
S308436	3	384	520	6.92 176	3/4 IN
S308437	1	44.3	60	6.61 168	3/4 IN
S308438	2	81	110	6.55 166.5	1 IN
S308439	3	221	300	6.73 171	1-1/2 IN
S308440	4	384	520	6.88 175	1 IN
S308450	2	148	200	6.77 172	3/4 IN
S308474	4	487	660	6.73 171	3/4 IN
S308475	2	148	200	6.55 166.5	1 IN

Fixtured Spindles

DGD Floating Adaptor Including Flange Housing for Right Angle Drive

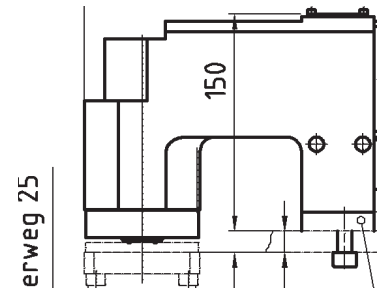

MODEL	MOTOR SIZE	TORQUE RANGE MAX		X DIMENSION IN MM	OUTPUT DRIVE IN
		FT LB	NM		
929041	1	44.3	60	2.95 75	3/8 IN
929053	2	125	170	3.54 90	1/2 IN
929061	2	148	200	4.52 115	3/4 IN
929065	3	221	300	4.13 105	3/4 IN
929077	4	384	520	4.52 115	3/4 IN
929089	4	487	660	4.52 115	1 IN