


Product **Specifications 50EAN150KB4** 

### **RIGHT ANGLE CORDED NUTRUNNER** 32 - 150 Nm (23.6 - 110.6 ft·lbs)

#### **RIGHT ANGLE - 50 SERIES**

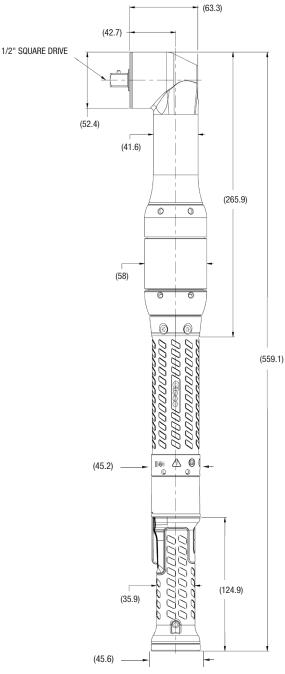

Apex Tool Group, LLC Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099 Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de

#### The NeoTek<sup>™</sup> fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

## **FEATURES**

- 1 million cycles maintenance-free\*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts
- Compatible with:
  - mPro400GCD-P Controller
  - 961560-xxx Tool Cable
  - 961561-xxx Tool Extension Cable

# **SPECIFICATIONS**

TORQUE RANGE (Nm)			<b>WEIGHT &amp; DIMENSIONS</b>	
	Min / Max:	32 / 150	Weight	3.75 kg / 8
	TORQUE RANGE (ft·lb)		Length	559 mm / 2
	Min / Max:	23.6 / 110.6	Side to Center	26.2 mm /
	<b>SPEED</b> r/min:	320	Height	64.5 mm /
			Output Drive	1/2" Sq. Dri
			Country of Origin:	Assembled
		I	(F	

eight	3.75 kg / 8.27 lb			
ength	559 mm / 22.01 in			
de to Center	26.2 mm / 1.03 in			
eight	64.5 mm / 2.54 in			
utput Drive	1/2" Sq. Drive			
ountry of Origin:	Assembled in USA			

\*based on recommended tool model torque range and clockwise rotation

