

The NeoTek™ fastening system is the next generation of smart tool solutions. The lightweight, ergonomic design along with fully programmable features such as the high-output LED light rings, audible alerts, and handle vibration all create a better user experience that leads to decreased operator fatigue and increased productivity.

## **FEATURES**

- 1 million cycles maintenance-free\*
- Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%
- 21% lighter (tool/cable system) than existing tool family
- Digital communication for reliable performance
- Internal temperature monitoring
- Configurable LED light rings
- Data logging with on-board tool memory
- Preventive maintenance alerts

## **SPECIFICATIONS**

**TORQUE RANGE (Nm)** 

Min / Max: 23 / 93

**TORQUE RANGE (ft-lb)** 

Min / Max: 16.9 / 68.5

**SPEED** 

r/min: 1,325

## **WEIGHT & DIMENSIONS**

Weight 5.20 kg / 11.46 lb

Length 566 mm / 22.28 in

33.1 mm / 1.30 in Side to Center

**Output Drive** 3/4" Sq. Drive


Country of Origin: Assembled in USA

CE

## **Product Specifications 70ESN95ND6**

INLINE CORDED NUTRUNNER 23 - 93 Nm (16.9 – 68.5 ft·lbs)

**INLINE - 70 SERIES** 

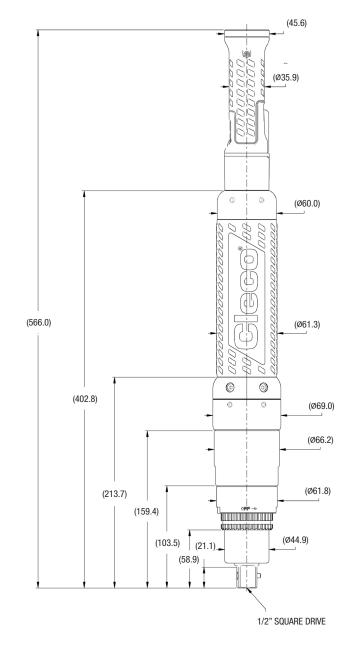



**Apex Tool Group, LLC** 

Phone: +1 (800) 845-5629 Phone: +1 (919) 387-0099

Phone: +49 (0)7363 81-0 www.ClecoTools.com / www.ClecoTools.de